64Channel NVR with 4SATA Port







Compression: H.265

Decoding: 4K

Channel: 64Channels

• Storage: 4 SATA Port (10TB each)

Throughput: 512Mbps

Matrix NVRs are packed with high end processors to deliver all the functionalities like high resolution recording, playback, simultaneous local and remote monitoring along with storing for higher number of days. Furthermore, these latest NVRs are also backed with an intelligent software to detect threats and send instant notifications for real-time security.

All in all, these comprehensive, flexible, reliable, integrated NVRs provide a proficient, persistent and a preventive security solution suitable for enterprises and multi-location offices.

USP



H.265 Compression Technique



4K Decoding Technique



12MP Recording Capability



Cascading



Adaptive Recording



RAID Support

64ChannelNVRwith4SATAPort



TECHNICAL SPECIFICATION VIDEO		
Output	HDMI (2.0) – 1 Port (Main)	
Compression	H.265/H.264/ Motion JPEG	
	AUDIO	
Input	1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)	
Output	1 Channel, RCA Port Mono, Unbalanced output, (2.0Vp-p),	
	Range (-2dBu to 22dBu)	
Compression	G.711μ	
Two-way Audio	Yes	
THROUGHPUT		
Downlink Throughput	256Mbps	
	Following Scenarios are Considered:	
	1. Cameras Streaming to Device	
	2. Cameras of Cascaded Devices are Being Viewed on Local	
	3. Streaming from NAS for Local/Web Client	
Uplink Throughput	256Mbps	
	Following Scenarios are Considered:	
	1. Cameras Streaming to Web Client	
	2. Storage or Backup to NAS	
Simultaneous Log-in	9+1(Admin)	
	DISPLAY	
Split (Through LAN/HDMI)	1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6,	
	8x8 and Sequential	
Local Decoding	4x 4K/ 10x 3MP/ 16x 1080p/ 64 x D1	
Snapshot	Yes	
Multiple Camera Viewing	Through Cascading (up to 20 Devices)	
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled	
	Channel (As per camera support)	
	RECORDING	
Image Resolution	12MP, 8MP, 5MP,3MP, 2MP, 720P, D1, CIF	
Pre-Record	Up to 30 Sec	
Post-Record	10-300 Sec	
Snapshot Format	JPEG	
Recording Format	Native	
Recording Types	Scheduled, Manual, Alarm and COSEC	
	STORAGE AND BANDWIDTH OPTIMIZATION	
Adaptive Recording	Automatically Reduces the Number of Frames Captured per Second Where There	
	is No Motion, Thereby Saving Storage Space.	
Bandwidth	Automatically Adapts Optimized Resolution on Local Display Through HDMI	
PLAYBACK AND BACKUP		

64ChannelNVRwith4SATAPort




Synchronous Playback	16 Channels @ 1080P (via. HDMI)	
Search Mode	Date and Time, Camera, Recording Type, Recording Drive	
Playback Modes	Fast Forward, Slow Forward, Slow Reverse, Fast Reverse at Different Speed	
,	Control, Next-Previous Frame	
Backup	Manual Backup over USB and NAS,	
	Scheduled Backup over USB, NAS and FTP	
	Scheduled Backup over USB through USB2.0 Interface	
	Manual Backup over USB through USB3.0 Interface	
	Quick Backup over USB, NAS and Local PC	
Configuration Backup	Yes	
Network Functions	TCP/IP, DHCP, PPPOE, DDNS, Free Matrix DNS, FTP, SMTP, NTP, RTP/RTSP,	
	CIFS/NFS, Network Acceleration, UDP	
Maximum User	120	
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log Information,	
	Upgrade	
EVENTS AND ACTION		
Trigger Events	Motion Detection, View Tampering, Trip Wire, Object Intrusion, Audio Exception,	
	Missing Object, Suspicious Object, Loitering, Object Counting, Recording Start,	
	Recording Fail, Camera Offline, Camera Online	
System Events	Manual Trigger, On Boot Alarm, Storage Alert, Disk Volume Full, Disk Fault,	
	Scheduled Backup Fail	
Actions	Recording on Selected Channel, Upload Images on FTP/ Email Server, Email	
	Notification with Snapshot, TCP Notification, Recall PTZ Preset Position, Turn	
	On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile	
	App	
_	STORAGE	
SATA Interface	4 SATA III (10TB per port)	
NAS	2 NAS (CIFS, NFS)	
USB	1 TB USB Drive	
RAID	RAID-0, RAID-1, RAID-5, RAID-10	
Retention	Camera wise, HDD usage % wise, Day wise	
	INTERFACES	
Network Interface	2 Ports x Ethernet (RJ-45) 10/100/1000Mbps	
USB	3 Ports (1x USB 3.0, 2x USB2.0)	
LED	System Status LED, Power LED	
Alarm Input	2	
Alarm Output	1	
Reset Switch	Yes	
Buzzer	Yes	
SYSTEM INTERFACE		
Processor	ARM Cortex A17 Quad-Core	
RAM	4GB	
Flash	2GB	

64ChannelNVRwith4SATAPort



OS	Embedded Linux	
Control Mode	Mouse, Web Client and Mobile Client	
CAMERA SUPPORT		
Third Party Camera	Cameras with ONVIF 2.0 and above	
Support		
ENVIRONMENT CONDITIONS		
Operating Temperature	0°C to +50°C (32°F to 122°F)	
Humidity Range	5% to 95% RH Non-Condensing	
ELECTRICAL AND MECHANICAL		
Power Input	SMPS (100-240-volt AC)	
Dimension(W×H×D)	442 (without clamp) × 105.75 × 240.45	
Weight (Kg)	3.88kg	

DIMENSIONS

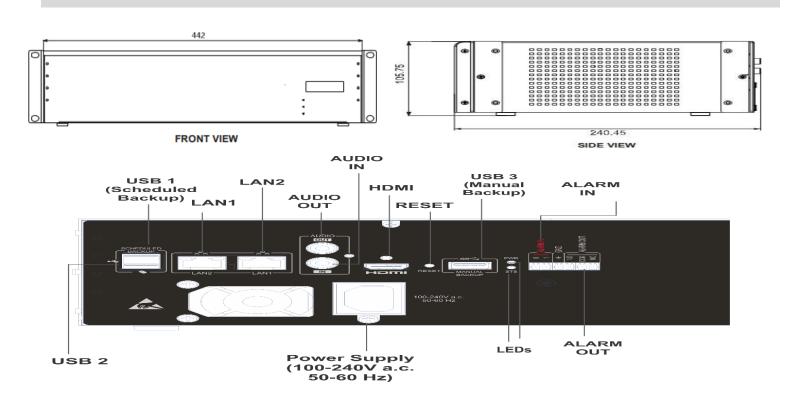

64Channel NVR with 4SATA Port



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara-390 010, India.

Ph: +91 265-613-7222

E-mail: Inquiry@MatrixComSec.com

Factory

19-GIDC, Waghodia,

Dist. Vadodara-391 760, India.

Ph: +91 265-613-7222

MATRIX COMSEC - North America

2 Wickstead Crt, Brampton, Ontario, L6R 1N8. +1 408-643-0581 (USA)

+1 437-266-1005 (Canada)

www.MatrixVideoSurveillance.com